

# SolarEdge Fast Mount 36

## For North America

SFM36



ACCESSORIES

### Accelerate backup system installation with the SolarEdge Fast Mount 36

- Reduce time, cost, and labor by quickly connecting the SolarEdge Home Hub Inverter and SolarEdge Home Backup Interface
- Pre-fitted knockouts to align the Inverter and the Backup Interface faster
- Integrated mounting template for measuring ease
- Additional savings from included connection hardware
- Increased mounting flexibility with knockouts on top and bottom
- Integrated 10-slot bar for conduit grounding
- Refined design aligns seamlessly with integrated SolarEdge Home products


# / SolarEdge Fast Mount 36

## For North America

### SFM36

		Units
<b>INSTALLATION SPECIFICATIONS</b>		
Dimensions (W x H x D)	36" x 6" x 6"	in
Weight	7.94	lbs
Ambient Temperature Range	-40 to +140	°F
<b>CONSTRUCTION</b>		
Material	Flame retardant, rigid polycarbonate diecast	
<b>STANDARD COMPLIANCE</b>		
Safety	UL 1741, NEMA Type 3R	

#### MECHANICAL DRAWING – TOP VIEW

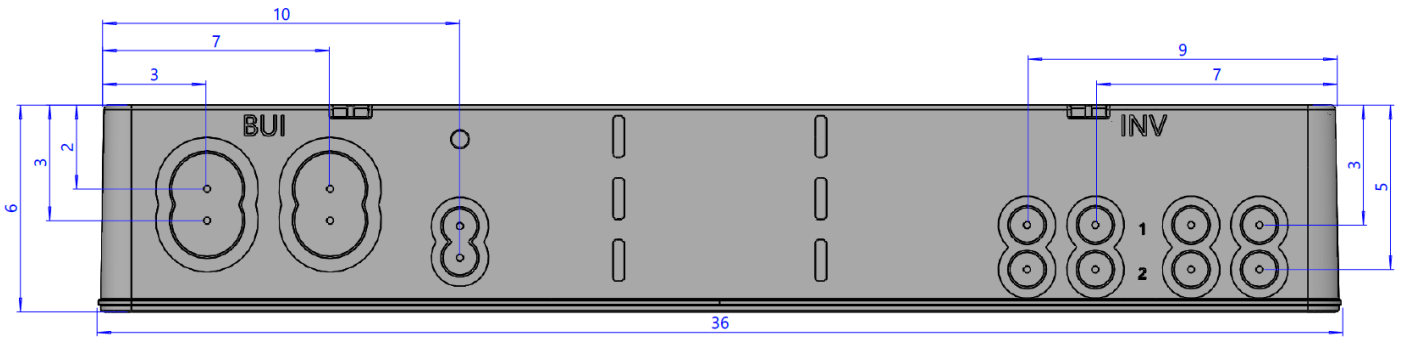

#### MECHANICAL DRAWING – BACK VIEW

